


# TSM

- ✓ Solar Keymark certified
- ✓ No magnesium anode required and maintenance free
- ✓ Unpressurized tank, pressurized water
- ✓ 5 years warranty

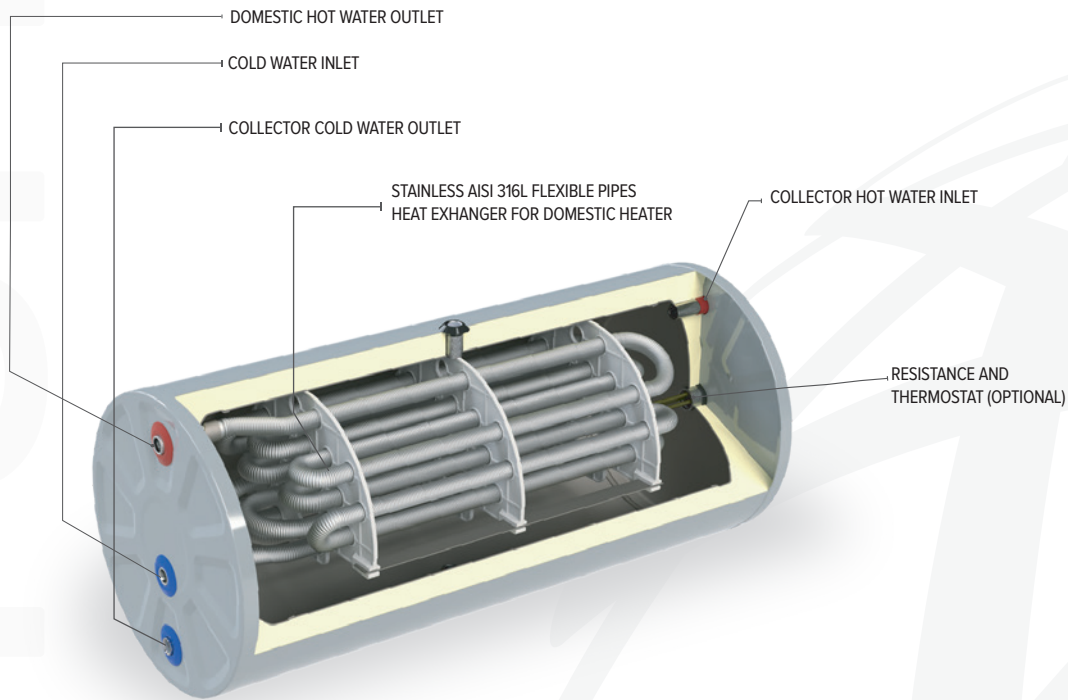

TSM		120	150	200	300	350
<b>Product information</b>						
Capacity	(L/day)	120	135	170	245	305
<b>Basic data</b>						
Weight	kg	48	52	60	80	100
Dimensions (height/diameter)	mm	950 X 540	1030 X 540	1200 X 540	1725 X 540	2165 X 540
Max permissible boiler water temperature	°C	95	95	95	95	95
Maximum working pressure	bar	6	6	6	6	6
Insulating material	-	PU	PU	PU	PU	PU
Insulating thickness	mm	50	50	50	50	50
Outer cylinder material	-	Static painted galvanized sheet				
<b>Domestic water exchanger (AISI 316L)</b>						
Water volume of the heat exchanger	L	12	12	12	12	12.6
Domestic water heat exchanger surface area	m <sup>2</sup>	3.8	3.8	3.8	3.8	4
Maximum working pressure	bar	6	6	6	6	6
<b>Pipe connection</b>						
Solar in/out	inch	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
Expansion tank connection	inch	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
Domestic water in/out	inch	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
Tank filling connection	inch	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
Electric heater	inch	G 1 1/4"	G 1 1/4"	G 1 1/4"	G 1 1/4"	G 1 1/4"

\*Solimpeks reserves the right to make changes to this table at any time.